

Java

Table

Technical file



SPARE PARTS



RECYCLABLE



ASSEMBLY

Description

Frame

Manufactured with a 6063-20 aluminum alloy profile of variable thickness between 2 and 10 mm. Extensible structure¹.

Screws

Manufactured in AISI 304 stainless steel that offers great resistance to corrosion in marine environments.

Paint

Powder paint based on polyester resins that offers great resistance to light and outdoor environments in accordance with QUALICOAT international specifications and ISO-2409 and ISO-2360 regulations.

Accessories


Caps and studs made of PVC.

Tabletop

HPL compact board formed by 10 mm thick resins.

Security


Product certified according to European safety regulations EN-581-1:2017 and EN-581-2:2017.



Java

Table

Capacity

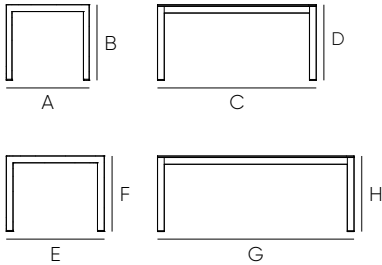

A - 90 cm E - 100 cm
 B - 74 cm F - 74 cm
 C - 140 cm* G - 200 cm**
 D - 74 cm H - 74 cm

* Extendable to 180 cm.
 ** Extendable to 260 cm.

Model	Package	Units	Measures	Weight	Volume
Java S	Box (2 packages)	1 u.	131x95x13 cm 102x86x10 cm	36 kg	0,25 m ³
Java L	Box (2 packages)	1 u.	191x105x13 cm 112x86x10 cm	54 kg	0,35 m ³
Java S	Pallet	10 u.	- cm	380 kg	2,5 m ³
Java L	Pallet	10 u.	- cm	580 kg	3,5 m ³

Finishes

Frame

Matte texture



Tabletop

HPL Basic



HPL GD





Java

Table

Maintenance plan

Weekly

Visual check of the general condition, removing dirt and ensuring there are no broken parts or damage that could be a danger to users.

Monthly

Check that the aluminum structure has no damage or deep scratches.
Check the structural strength and stability.
Check the condition of the caps and studs.

Annual

Repair any damage to the paint.
Replace any worn or damaged parts.

Wintering and storage

Clean with soapy water and a soft cloth.
Remove damp stains, sand and seawater.
Store horizontally in a dry place.

Observations

- Always use Balliu spare parts.
- Balliu does not manufacture parts for other brands.
- If the product is subject to heavy use, maintenance checks must be carried out more frequently.
- Do not use the product until maintenance is completed.
- Do not use aggressive chemicals to clean the product.
- Always use products with a neutral pH.
- Use a soft cloth to clean the product.

